

Available online at [www.ijit.net](http://www.ijit.net)

**International Journal of Integrative sciences, Innovation and Technology (IJIT)**  
(A Peer Review E-3 Journal of Science Innovation Technology)

Journal homepage: <http://www.ijit.net/>

eISSN 2278-1145  
Research Unlimited  
Vol. V Iss 1

# Numerical Analysis of the Bearing Capacity of Stone Columns Improved Ground

Mohammadreza Jaber Nasab<sup>a</sup>, Adel Asakereh<sup>b\*</sup>

<sup>a</sup>Department of Civil Engineering, University of Hormozgan, Pardis-E-Qeshm, Iran

<sup>b</sup>Assistant Professor, Department of Civil Engineering, University of Hormozgan

## ARTICLE INFO

### Article history:

Received 05 December 15

Received in revised form 10 January 16

Accepted 10 February 16

### Keywords:

Bearing Capacity

Square Footing

Stone Column

Numerical Analysis

## ABSTRACT

Stone columns are a suitable technique for increasing the bearing capacity of soft and weak soils. In this study the results of a series of finite element analyses on square footing rested on both improved and unimproved soft soil were presented. The developed model was validated by one of the existing experimental reports. Afterwards, the parametric studies were performed to determine the effective geometrical and mechanical parameters and their effects on the bearing capacity of footing. Results indicated that the bearing capacity of footing can be considerably improved by implementation of stone columns. It was observed that the bearing capacity ratio (BCR) increases with increasing friction angle of stone column and decreasing cohesion and friction angle of soft soil.

© 2012 Editor-IJIT. Hosting by AGSI Publications. All rights reserved.

**How to cite this article:** Mohammadreza Jaber Nasab and Adel Asakereh (2015). Numerical Analysis of the Bearing Capacity of Stone Columns Improved Ground, International Journal of integrative Sciences, Innovation and Technology (IJIT), 4(6), 1 – 5.

## 1. Introduction

Deep vibratory method such as vibro-compaction and vibro-replacement are ground improvement techniques to improve the bearing capacity and settlement of weak soils. In the vibro-compaction technique, vibrator penetrates into the soil and by applying the lateral forces causes the soil particles to re-arrange into a denser state. This technique reaches its technical and economic limits in saturated sands with high silt contents, as fine particles attenuate the horizontal forces imparted by the vibrating poker (McCabe, McNeill, & Black, 2007). Due to the limitations of vibro-compaction in cohesive soils, vibro stone columns were developed in the early 1950s. In this method, when the vibrator poker penetrate the soil, the excavated borhole, backfilled in successive stages with coarse aggregate, which is compacted by re-

lowering the poker. This process results in stone columns which are tightly inter-locked with the surrounding soil (Killeen, 2013). Stone columns can easily be constructed up to a diameter of 1.5 meter and typically replace 10–35% of the in situ soil (McKelvey, Sivakumar, Bell, & Graham, 2004). Stone columns can be used to increase bearing capacity of the foundation, reduce total and differential settlements, increase the slopes stability, accelerate the consolidation time and decrease the liquefaction potential. For some structures such as liquid storage tanks, abutments, embankments, and factories rested on compressible soils that can tolerate some settlement, stone columns are an economical improvement method.

In this paper a numerical simulation carried out on the stone columns improved ground and effects of mechanical and geometrical characteristics of the model on the bearing capacity, were investigated.

\* Corresponding author. Tel.: +0-000-000-0000 ; fax: +0-000-000-0000.

E-mail address: [author@institute.xxx](mailto:author@institute.xxx)

Peer review under responsibility of board of IJIT AGSI.



Hosting by AGSI Publications

IJIT/ – see front matter ©2012editor.ijit.. Hosting by AGSI Publications. All rights reserved.

<http://www.ijit.net>

2. Numerical analysis

Two-dimensional axisymmetric FE numerical simulations were performed using Plaxis commercial program (Brinkgreve, 2002). The aim of this study is evaluate the bearing capacity of the square foundation on the ground improved with small groups of stone columns. Thus, 2x2, 3x3 and 5x5 groups of stone columns were considered. For simulation of group of stone columns in axisymmetric configuration, group of stone columns were replaced by equivalent rings of stone columns such that same areas were created. An example of this idealization is shown in Fig. 1. Similar modeling simulation was used by others(Ambily & Gandhi, 2007; Elshazly, Hafez, & Mossaad, 2008; Ghazavi & Nazari Afshar, 2013; Mitchell & Huber, 1985).

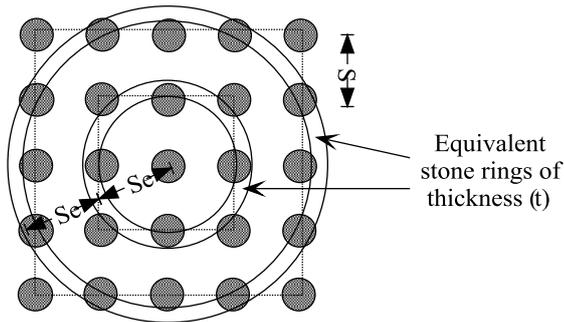


Fig. 1 - Concentric rings idealization for group of 5x5.

The model mesh was generated using 15-node triangular elements. The left and right boundaries were only permitted to move vertically and the bottom of the model was constrained against both horizontal and vertical movements. It was assumed that foundation is rigid. Hence, a uniform settlement applied in the vertical direction to all nodes at the soil-footing interface. It was assumed that the stone columns located on a rigid substrate (end bearing stone column) and the groundwater level is in the same level of the clay bed. Mesh refinement was done for elements around the footing and stone columns where the stresses are concentrated in these regions. Typical adopted mesh is shown in Fig. 2. An elastic-plastic Mohr Coulomb (MC) model with drained behaviour was selected for both the clay and stone column. Benchmark material properties were considered to be in accordance with study of previous researchers(Nassaji & Asakerreh, 2013). That are presented in table 1.

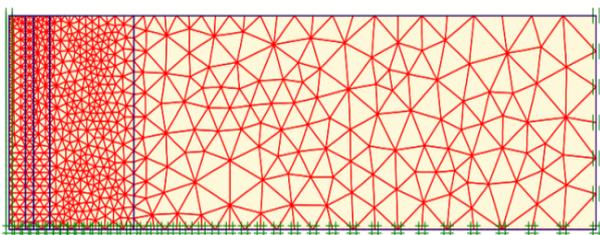


Fig. 2 - Typical mesh shape for numerical analysis.

Table 1 –Benchmark materials properties

Parameter	Soft soil	Stone column
E (kPa)	3000	60000
ν	0.35	0.2
φ(°)	20	42
ψ(°)	-	12
C' (kPa)	5	-
γ <sub>sat</sub> (kN/m <sup>3</sup> )	18	20

Accuracy of the developed model was verified by laboratory studies conducted by (Narasimha Rao, Madhiyan, & Prasad, 1992). They performed a series of laboratory tests to determine the load bearing capacity of single stone columns. The tank diameter and height of soft clay used in their study were 650 mm and 350 mm, respectively. Loading were applied through a load plate with a diameter of 50 mm on a stone column with diameter of 25 mm and height of 225 mm. Properties of the materials in their study are presented in table 2. Geometry of the created model for validation is presented in Fig. 3.

Fig. 4 compares the results obtained from the model test and numerical simulation, which matches well.

3. Results

In the parametric analysis of the this section, behaviour of stone columns improved ground, is evaluated through a dimensionless parameter (BCR), which is defined as follows:

$$BCR = \frac{q_{improved}}{q_{unimproved}} \quad (1)$$

Where, q\_improved and q\_unimproved are ultimate bearing capacities of the footing on stone columns improved ground and on unimproved ground, respectively. Should be noted that in this study, the ultimate bearing capacity was considered equal to pressure at a settlement of 10% of the footing width, unless before this settlement, the maximum pressure is observed.


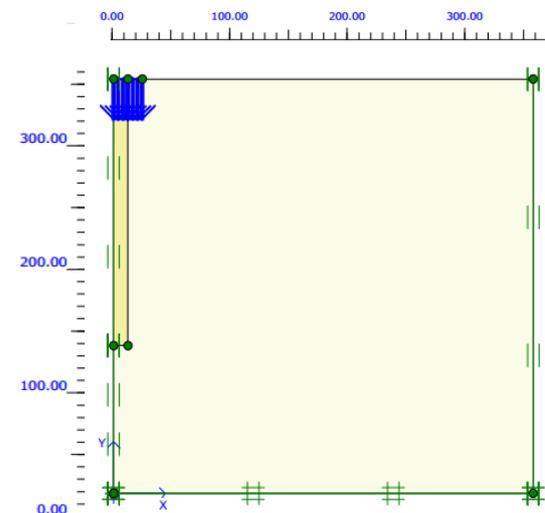


Fig. 3 - Geometry of the model for validation

**Table 2–Properties of the materials used for validdion (Narasimha Rao et al., 1992)**

Parameter	Soft soil	Stone column
E (kPa)	4000	45000
$\nu$	0.45	0.3
$\phi(^{\circ})$	0	38
$C_U$ (kPa)	20	0

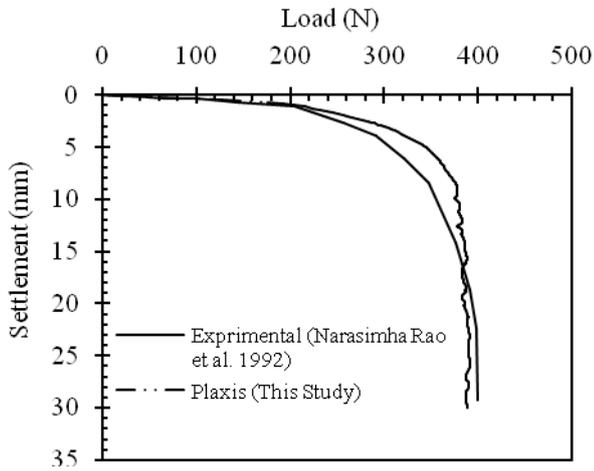


**Fig. 4 - Validation of PLAXIS**

**3.1. Effect of soil cohesion**

A series of FEM analysis were conducted to investigate the effect of soil cohesion on CBR values. Results of these analyses for 2×2, 3×3 and 5×5 groups of stone columns are presented in Fig. 5. It is seen that BCR decreases with increase in cohesion, that the value of this reduction is higher in smaller groups of stone columns.

**3.2. Effect of soil friction angle**

Effect of friction angle of the surrounding soil on the BCR for 2×2, 3×3 and 5×5 groups of stone columns, are shown in Fig. 6. According to this figure, can be said that with increasing the soil friction angle, BCR decreases slightly. The amount of this reduction, is more explicitly in higher area replacement ratio.

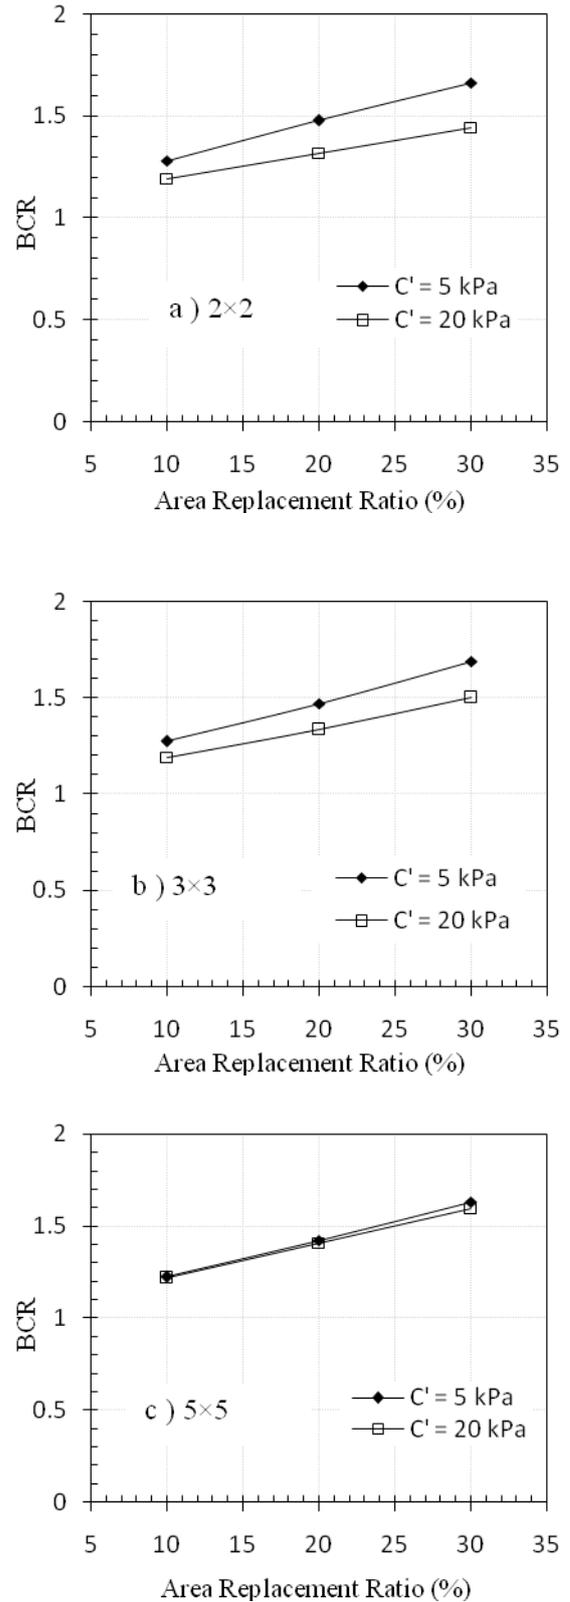

**Fig. 5 - Effect of soil cohesion on BCR**

3.3. Effect of stone column friction angle

Fig. 7 is shown effect of stone column friction angle on BCR values for 2x2, 3x3 and 5x5 groups of stone columns. It can be seen that the BCR increases with increasing friction angle of stone column. BCR variations due to stone column friction angle variations, are more obvious in the greater area replacement ratios, because of increasing participation of the columns in load bearing in greater area replacement ratios.

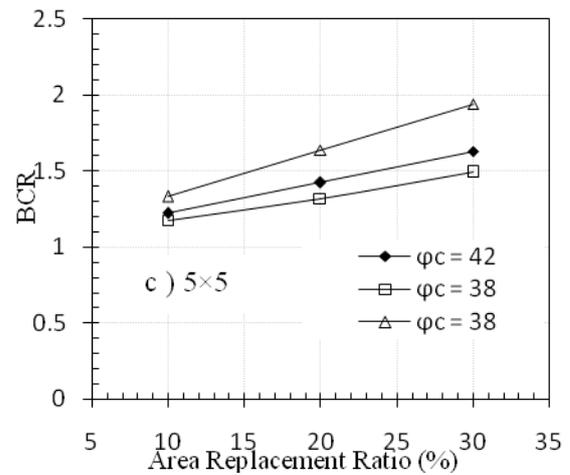
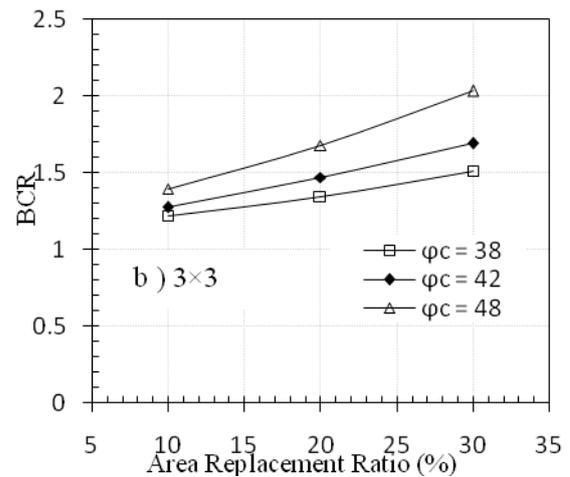
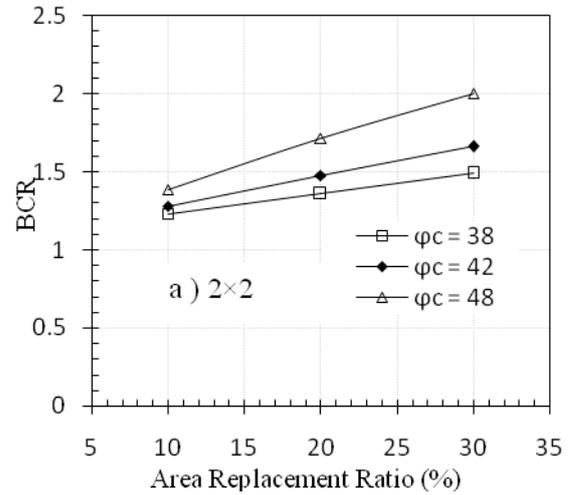
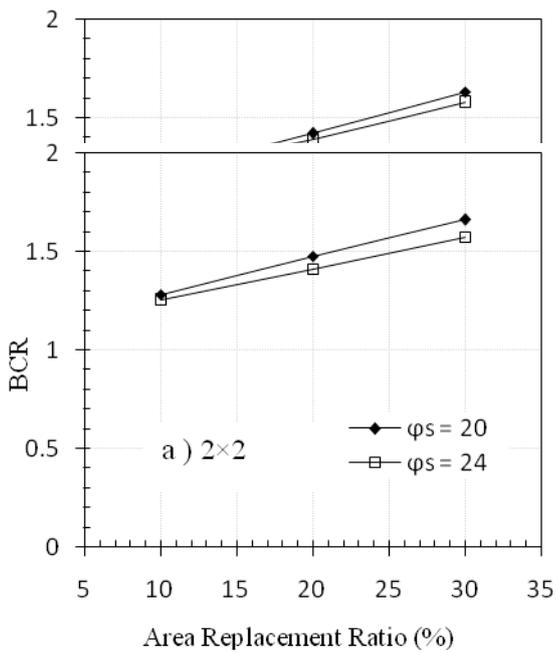
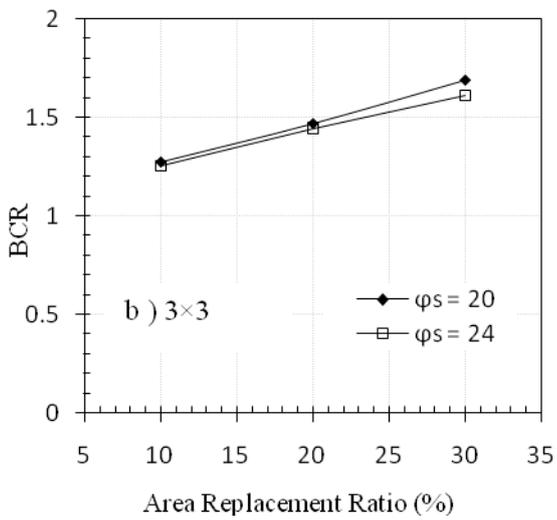
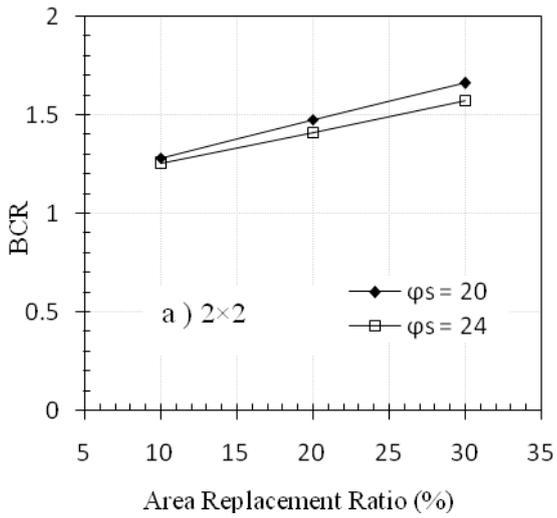


Fig. 7 - Effect of stone column friction angle on BCR

---

#### 4. Conclusions

In this study numerical investigations were performed to evaluate the behaviour of square footing on the stone columns improved ground. Mohr–Coulomb failure criterion considered for both the soil and stone column. Based on performed analyses, the following conclusions are drawn:

- BCR decreases with increase in soil cohesion, that the value of this reduction is higher in smaller groups of stone columns.
- With increasing the soil friction angle, BCR decreases slightly. The amount of this reduction, is more explicitly in higher area replacement ratio.
- BCR increases with increasing friction angle of stone column. BCR variations due to stone column friction angle variations, are more obvious in the greater area replacement ratios, because of increasing participation of the columns in load bearing in greater area replacement ratios.
- 

#### REFERENCES

---

- Ambily, A., & Gandhi, S. R. (2007). Behavior of stone columns based on experimental and FEM analysis. *Journal of Geotechnical and Geoenvironmental Engineering*, 133(4), 405-415.
- Brinkgreve, R. (2002). *Plaxis: finite element code for soil and rock analyses: 2D-Version 8: [user's guide]*: Balkema.
- Elshazly, H., Hafez, D., & Mossaad, M. (2008). Reliability of conventional settlement evaluation for circular foundations on stone columns. *Geotechnical and Geological Engineering*, 26(3), 323-334.
- Ghazavi, M., & Nazari Afshar, J. (2013). Bearing capacity of geosynthetic encased stone columns. *Geotextiles and Geomembranes*.
- Killeen, M. (2013). *Numerical modelling of small groups of stone columns* (PHD), National University of Ireland, Galway.
- McCabe, B. A., McNeill, J. A., & Black, J. A. (2007). *Ground improvement using the vibro-stone column technique*. Paper presented at the Joint meeting of Engineers Ireland West Region and the Geotechnical Society of Ireland, NUI Galway.
- McKelvey, D., Sivakumar, V., Bell, A., & Graham, J. (2004). Modelling vibrated stone columns in soft clay. *Proceedings of the ICE-Geotechnical Engineering*, 157(3), 137-149.
- Mitchell, J. K., & Huber, T. R. (1985). Performance of a stone column foundation. *Journal of Geotechnical Engineering*, 111(2), 205-223.
- Narasimha Rao, S., Madhiyan, M., & Prasad, Y. V. S. N. (1992). *Influence of bearing area on the behavior of stone columns*. Paper presented at the Indian Geotech. Conf., Calcutta, India.
- Nassaji, F., & Asakereh, A. (2013). Effect of Granular Bed on Behaviour of Stone Column Improved Ground. *International Journal of Science and Engineering Investigations*, 2(23), 67-71.